



Stainless steel crimped mesh with opening size from 0.70 mm to 50mm.

The wire mesh was made according to the technical requirements ASTM E2016.


The materials of the wires for mesh are conforming to the requirements ASTM A580.

Mesh	Opening Size		Wire Diameter		Open Area	Roll Width Max
	inch	mm	inch	mm	(%)	mm
2"	1.884	47.86	0.116	2.94	88.76	2000
2"	1.865	47.38	0.135	3.42	86.99	2000
2"	1.841	46.76	0.159	4.04	84.73	2000
2"	1.788	45.42	0.212	5.38	79.94	2000
1 1/2"	1.396	35.46	0.104	2.64	86.62	2000
1 1/2"	1.365	34.68	0.135	3.42	82.85	2000
1 1/2"	1.341	34.06	0.159	4.04	79.92	2000
1×1	0.92	23.37	0.08	2.03	84.65	2000
1×1	0.884	22.46	0.116	2.94	78.19	2000
1×1	0.865	21.98	0.135	3.42	74.88	2000
2×2	0.453	11.51	0.047	1.19	82.14	2000
2×2	0.428	10.87	0.072	1.83	73.26	2000
2×2	0.396	10.06	0.104	2.64	62.75	2000
2×2	0.38	9.65	0.12	3.05	57.74	2000
3×3	0.279	7.1	0.054	1.37	70.26	2000
3×3	0.261	6.64	0.072	1.83	61.44	2000
3×3	0.253	6.44	0.08	2.03	57.8	2000
4×4	0.222	5.64	0.028	0.71	78.89	2000
4×4	0.203	5.16	0.047	1.19	66.03	2000
4×4	0.187	4.75	0.063	1.6	55.96	2000
4×4	0.17	4.32	0.08	2.03	46.28	2000
5×5	0.165	4.19	0.035	0.89	68.03	2000
5×5	0.153	3.89	0.047	1.19	58.64	2000
5×5	0.137	3.48	0.063	1.6	46.93	2000
6×6	0.132	3.34	0.035	0.89	62.37	2000
6×6	0.126	3.19	0.041	1.04	56.9	2000
6×6	0.12	3.04	0.047	1.19	51.68	2000
6×6	0.104	2.63	0.063	1.6	38.69	2000
8×8	0.108	2.75	0.017	0.43	74.75	2000
8×8	0.097	2.47	0.028	0.71	60.28	2000
8×8	0.09	2.29	0.035	0.89	51.79	2000
8×8	0.078	1.99	0.047	1.19	39.09	2000
10×10	0.083	2.11	0.017	0.43	69.01	2000
10×10	0.075	1.91	0.025	0.635	56.25	2000
10×10	0.068	1.73	0.032	0.813	46.23	2000
10×10	0.053	1.35	0.047	1.19	28.25	2000
12×12	0.066	1.69	0.017	0.43	63.5	2000
12×12	0.06	1.54	0.023	0.58	52.71	2000
12×12	0.055	1.41	0.028	0.71	44.16	2000
12×12	0.048	1.23	0.035	0.89	33.59	2000
14×14	0.056	1.43	0.015	0.38	62.5	2000
14×14	0.052	1.31	0.02	0.5	52.48	2000
14×14	0.043	1.1	0.028	0.71	37.05	2000
16×16	0.048	1.21	0.015	0.38	57.86	2000

16×16	0.045	1.14	0.018	0.45	51.34	2000
16×16	0.04	1.01	0.023	0.58	40.28	2000
16×16	0.035	0.88	0.028	0.71	30.55	2000
18×18	0.042	1.06	0.014	0.35	56.55	2000
18×18	0.039	0.98	0.017	0.43	48.34	2000
18×18	0.036	0.91	0.02	0.5	41.69	2000
18×18	0.033	0.83	0.023	0.58	34.69	2000
20×20	0.036	0.92	0.014	0.35	52.48	2000
20×20	0.033	0.84	0.017	0.43	43.75	2000
20×20	0.03	0.77	0.02	0.5	36.76	2000
20×20	0.027	0.69	0.023	0.58	29.52	2000

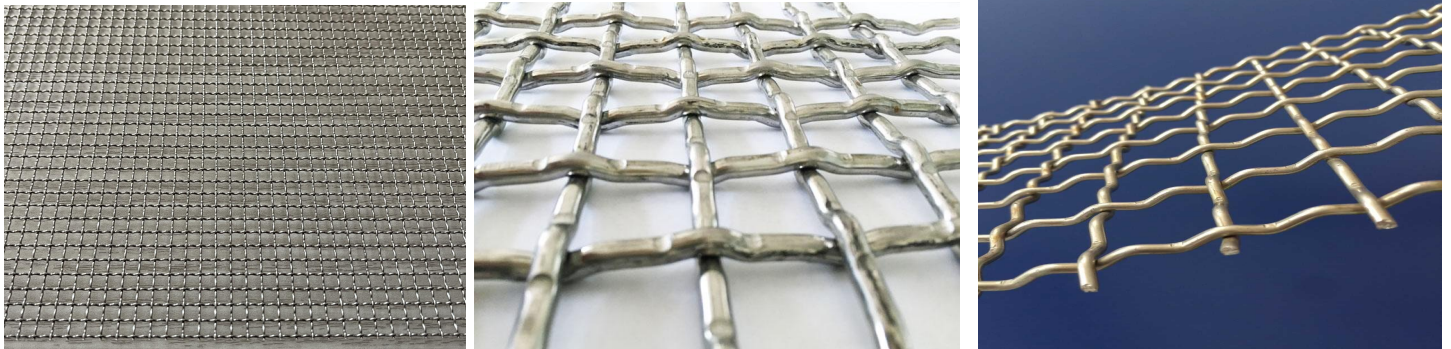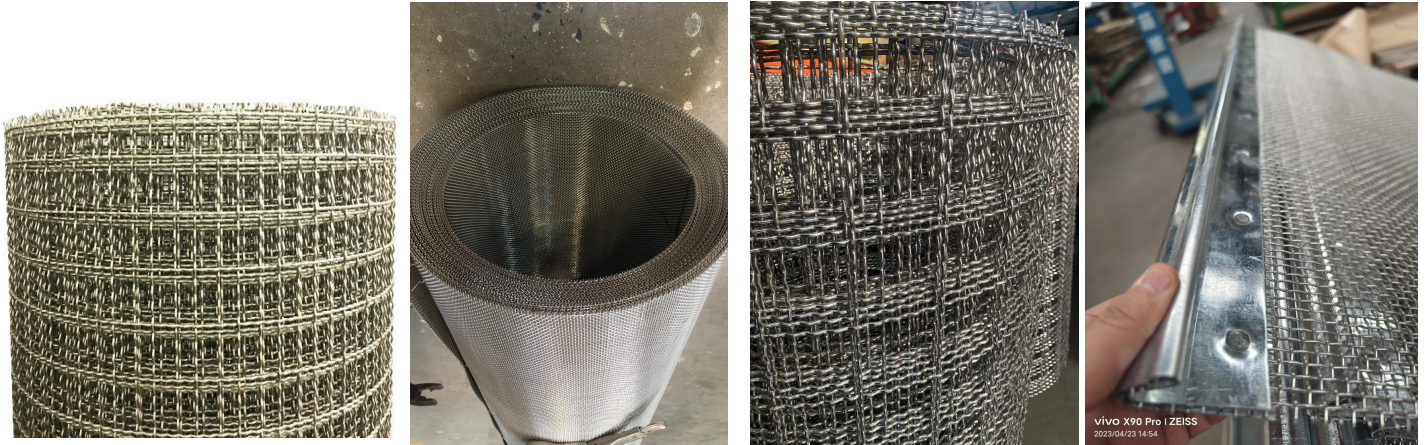

**Special
Crimped
Woven
Wire mesh**

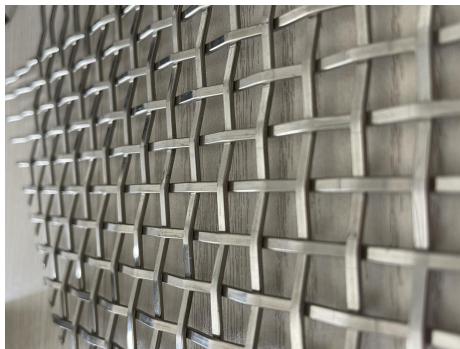

Any interest, please feel free to contact us!
Dashang Wire Mesh
Email: sales@dashangmesh.com
Tel/Fax: 0086 318 7563319/7521333
Pho: 0086 18632807688
Industrial Woven Wire Mesh Solution!

